Tablet Stand
QUICK START GUIDE

Please read this manual carefully before using device.

Product Profile

- Flat back shell
- TYPE-C cable
- Magnetic
- Backshell supports
- Fixed the hook
- Shrapnel contact plates
- Lever pull switch
- Unlock
- lock
- Stylus holder
- Anti-theft lock interface
- 180°
- 90°
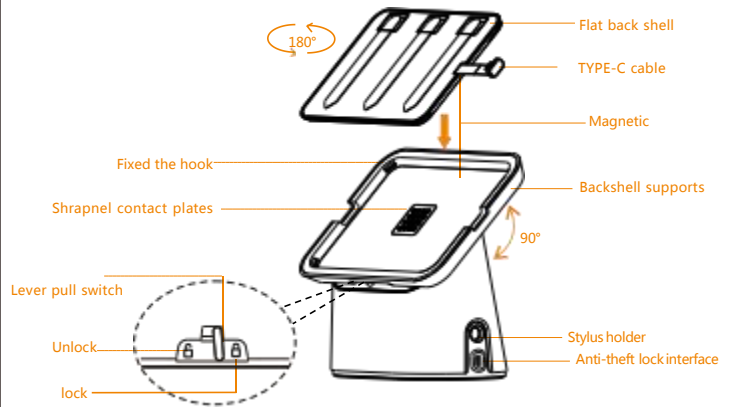
Packaging content

Device	1 piece
Alcohol swab	1 piece
Charging cable	1piece 2m dual
	TYPE-C head charging cable
Spare glue	3 pieces
User guide	Including Product Warranty Card,
	Product certification

It is recommended to use the adapter inside the original packaging of the iPad for charging.
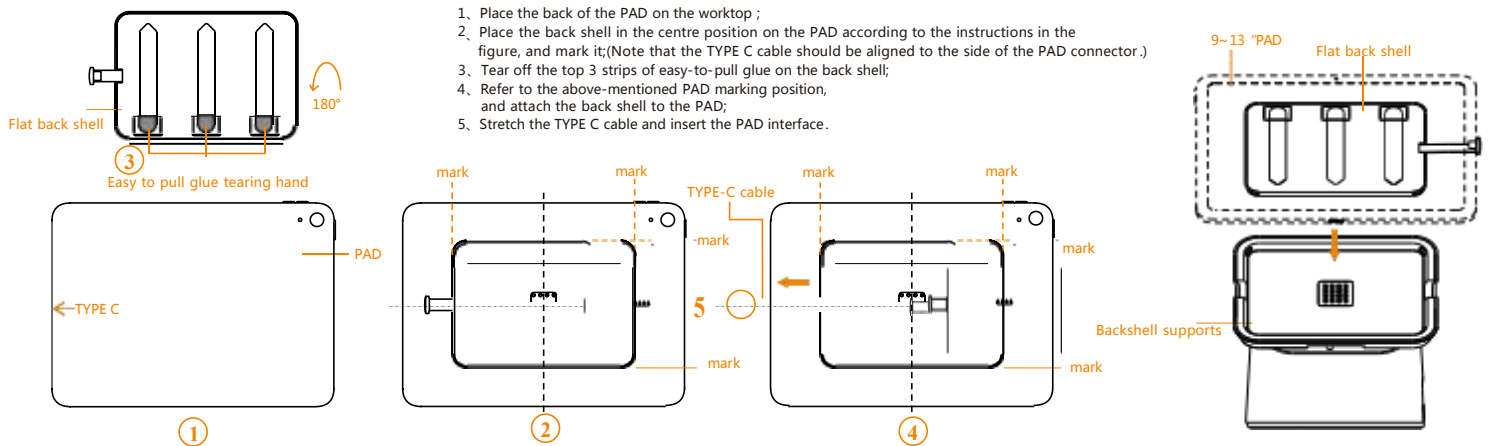
Depending on the usage of the device, it may not be possible to fully charge when the screen brightness is 100% or the sleep function is disabled, or when the adapter output power is below 18W (9V/2.22A).
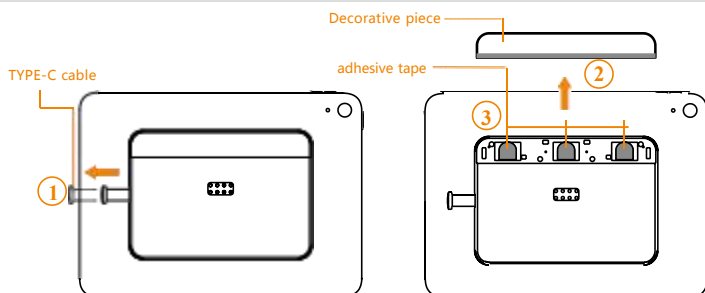
Product parameters

CE FC

Electric	
Input	5~20V --- 6~1.5A
Support PAD size	9~13 Inch
Electrical parameters	
Standby power	0.23W
Maximum operating power	30W（65W MAX）
Operating temperature	0℃-50℃
Operating humidity	10%-90%
Weight	
Net weight	2.0KG
Packing dimension	29.5cm(L)x 21cm(W)x 13cm(H)
Gross weight	2.6KG

Installation Notes

1、Place the back of the PAD on the worktop；
2、Place the back shell in the centre position on the PAD according to the instructions in the figure, and mark it;(Note that the TYPE C cable should be aligned to the side of the PAD connector .)
3、Tear off the top 3 strips of easy-to-pull glue on the back shell;
4、Refer to the above-mentioned PAD marking position, and attach the back shell to the PAD;
5、Stretch the TYPE C cable and insert the PAD interface .

- Flat back shell
- Easy to pull glue tearing hand
- PAD
- TYPE C
- mark
- TYPE-C cable
- 9~13 "PAD
- Flat back shell
- Backshell supports
- 180°

Disassembly Notes

- TYPE-C cable
- Decorative piece
- adhesive tape

1.Pull out the TYPE-C cable from the PAD;
2.Remove the decorative strip on the back shell;
3.Pull up the 3 strips of easy-to-pull glue on the back shell by hand to remove them.

Dimensions

unit: mm

- 181
- 134
- 168
- 162
- 25~80
- 114
- 95
- LAN USB-A USB-C PD
- Contact plates