
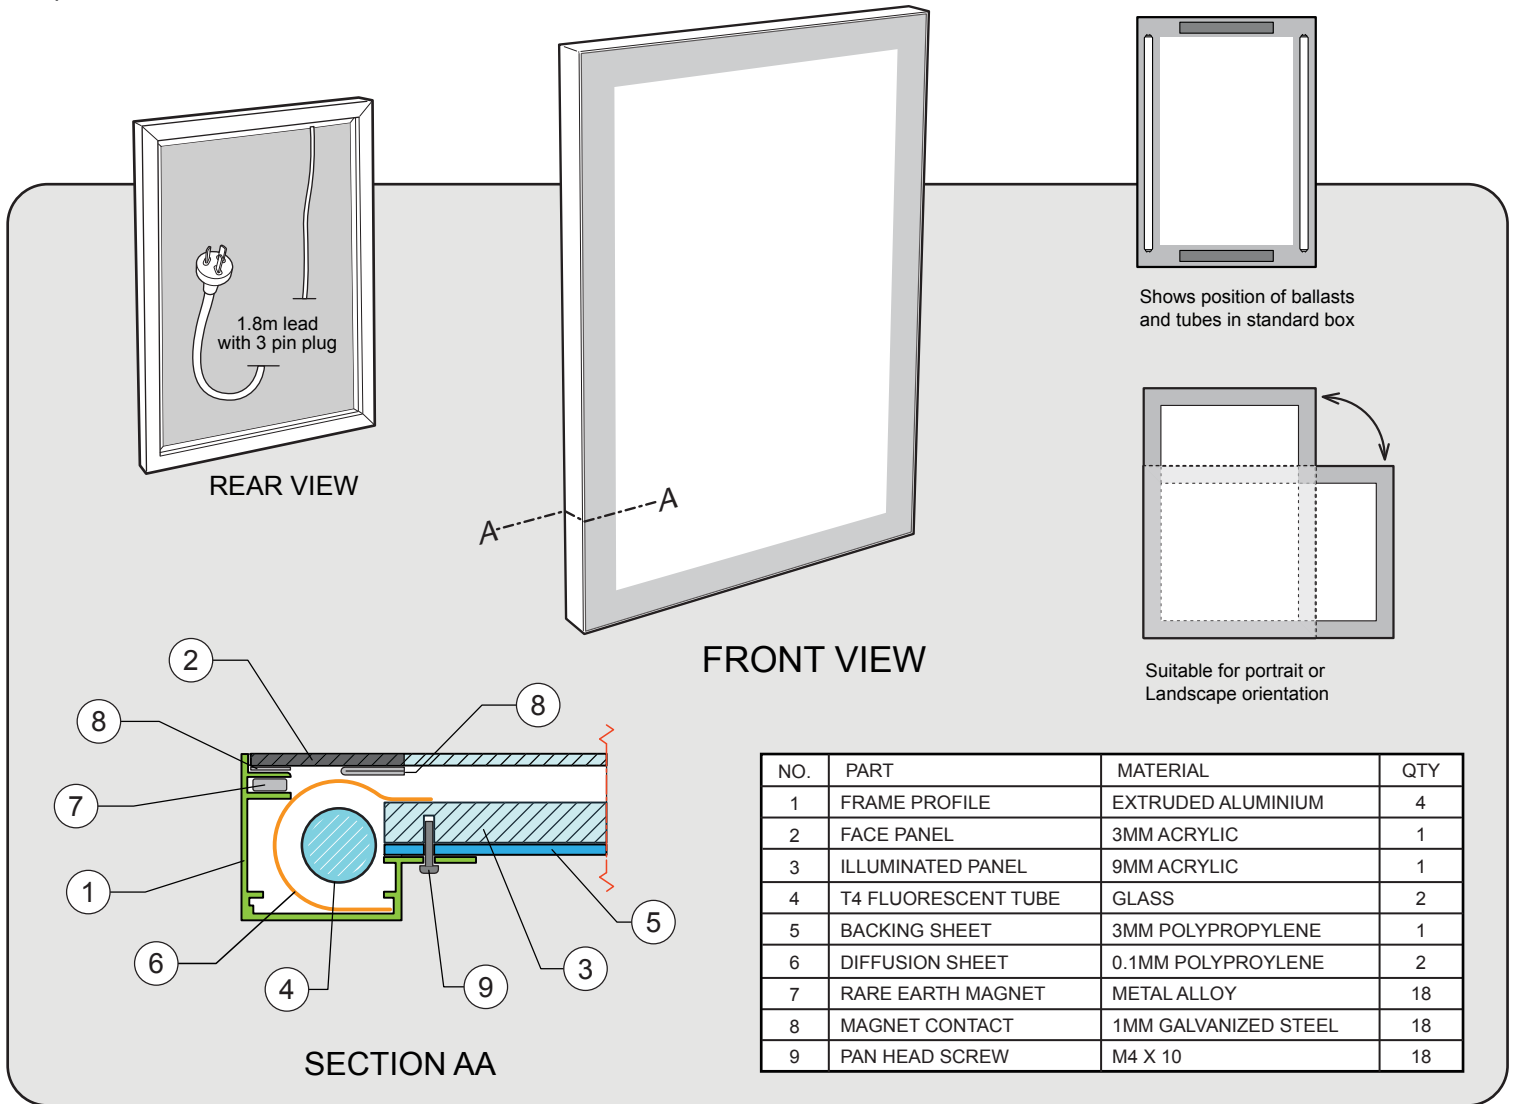



SD-B Retail Lumi

Sophisticated Interior Illumination



Unit and Artwork Dimensions

Model	Unit size			Graphic area		Mount holes			Poster size standard "A" sizes	
	H	W	D	Gh	Gw	Mh	Mw	Md		
SDB - A0	1261	913	42	1167	819	1211	713	6	1189	841
SDB - A1	913	666	42	819	572	863	466	6	841	594
SDB - A2	666	492	42	572	398	616	292	6	594	420
SDB 2010	2000	1000	42	1906	906	1950	800	6	1931	931
SDB 1890	1800	900	42	1706	806	1750	700	6	1731	831
SDB 1510	1500	1000	42	1406	906	1450	800	6	1431	931
SDB 1270	1200	700	42	1106	606	1150	500	6	1131	631
SDB 1260	1200	600	42	1106	506	1150	400	6	1131	531
SDB 9090	900	900	42	806	806	850	700	6	831	831

Custom sizes and specifications can be facilitated

Technical Performance Statistics

Model	Average Brightness	Lighting and Ballasts	Annual Power Consumption*	Average Bulb Life **	Weight (kg)
SDB - A0	2650 LUX	T5 28W x 2 = 56W	A\$36.79	3 years	28.0
SDB - A1	2890 LUX	T5 21W x 2 = 42W	A\$27.59	3 years	14.6
SDB - A2	3060 LUX	T5 14W x 2 = 28W	A\$18.20	3 years	8.4
SDB 2010	3360 LUX	T5 21W x 4 = 84W	A\$55.19	3 years	40.0
SDB 1890	3210 LUX	T5 21W x 4 = 84W	A\$55.19	3 years	33.0
SDB 1510	3260 LUX	T5 31W x 2 = 62W	A\$40.73	3 years	31.3
SDB 1270	3150 LUX	T4 28W x 2 = 56W	A\$36.79	3 years	15.8
SDB 1260	3110 LUX	T4 28W x 2 = 56W	A\$36.79	3 years	15.0
SDB 9090	3190 LUX	T5 21W x 2 = 42W	A\$27.59	3 years	20.0

* Annual power consumption based on 12 hour operational day at \$0.15/Kw (Australian average in 2006)

** Bulb life calculated based on 12 hour operational day

© Copyright 2007 and Intellectual Property reserved. CONFIDENTIAL: Not to be used for any purpose without the express written authorisation of CS & G Signage Group Pty. Limited.

All dimensions and information are intended as a guide only and are subject to change without notice.