
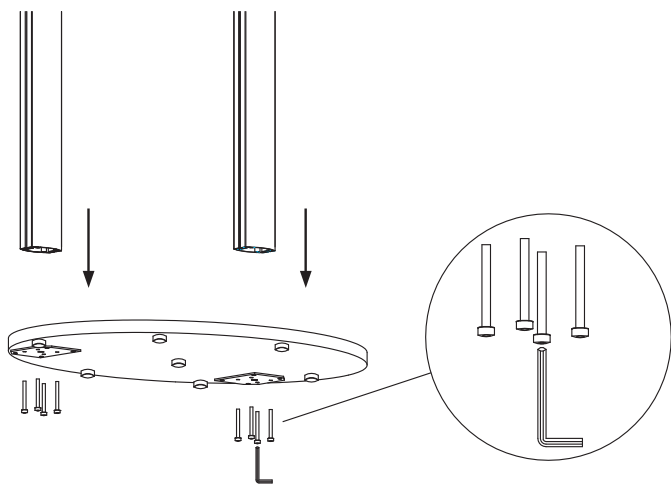


TVON6BK & TVON6SV LCD Stand Assembly Instruction


Thanks for using our TVON6 LCD Stand. This LCD Stand will accomodate LCD from 32" to 65" diagonally. Can advertise your products in the background, poster size is 1350 x 500mm

Part	ID	Qty
Base	A	1
Poles	B	2
Rails	C	2
Plates	D	2
Brackets	E	2
Allen Key	F1	1
Allen Key	F2	1
Bolts	G	8
O-Rings	H	8
Carry Bag (not shown)		

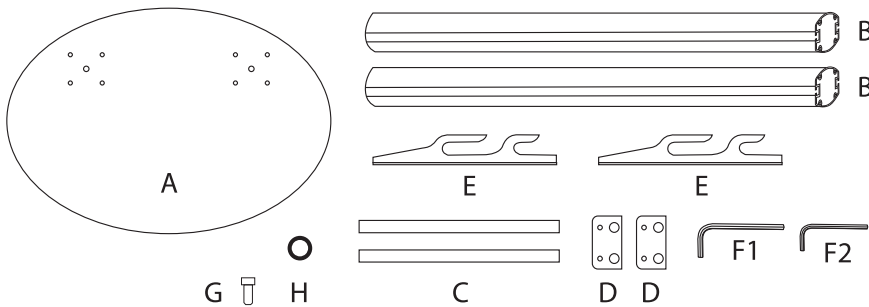

Step 1.

2pcs of Poles (B) insert into the bottom holes of Base (A) , fixed with bolts (G) by allen key (F1)

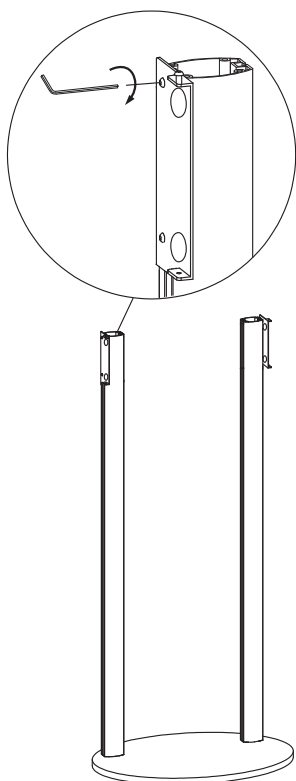


Step 2.


Slide the Plates (D) in slot of Poles (B) , adjust the height of Fixed Plate (D) to your desired height, then tighten the screws.

Step 3.

Put the poster along the rail of poles (B) as the picture shown , Maximum thickness of poster is 5mm.

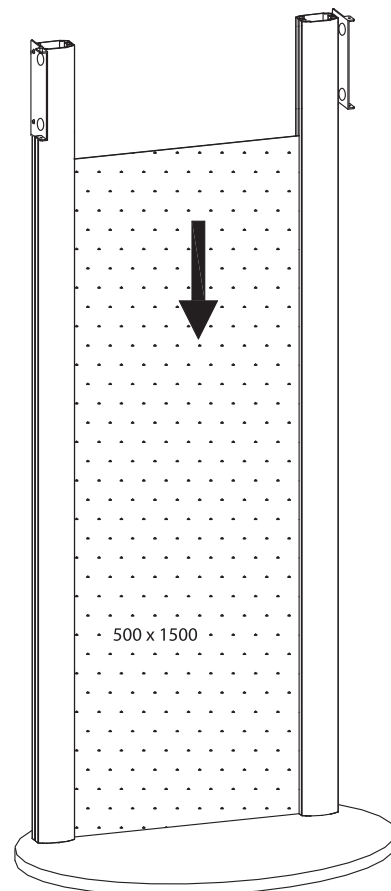


TVON6BK & TVON6SV LCD Stand Assembly Instruction

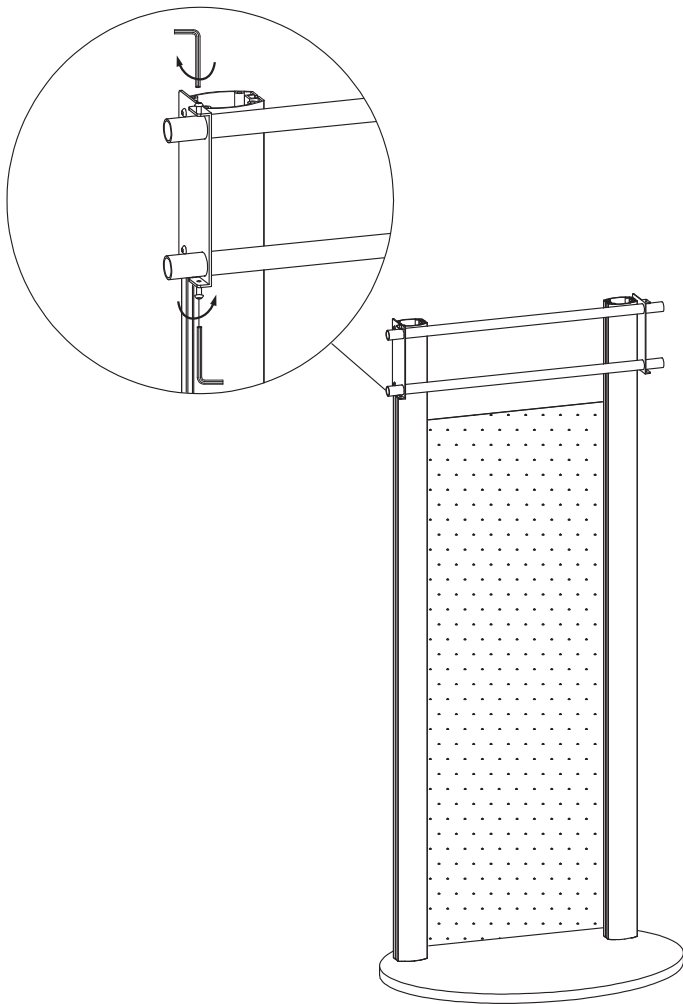


Step 4.

Place the O-rings (H) on the rails (C)

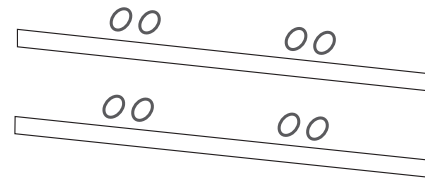


Step 5.

2pcs of rails (C) insert into the Plates (D), Tighten the screws by Allen Key (F) in clockwise direction as the picture shown.

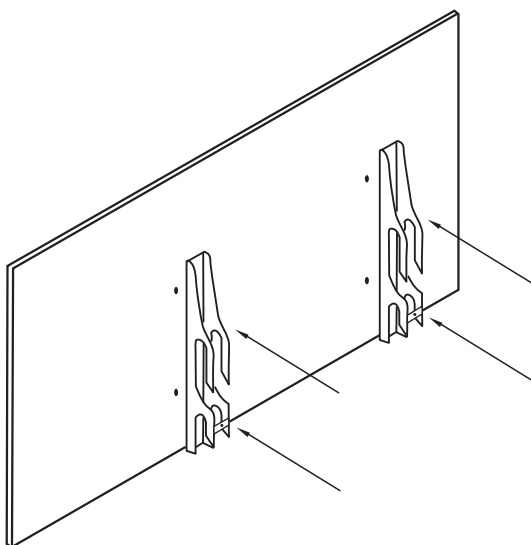

Step 6.

Mount Brackets (E) into the back of LCD screen. Using the Allen Key (F2) to screw the bolts into the screen.

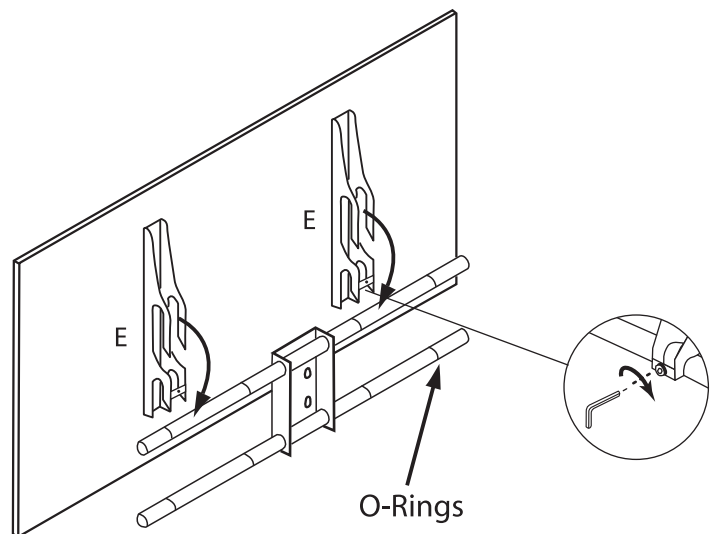

Step 7.

Lift the LCD screen by 2 people and hook the brackets (E) on the Rail (C) as the picture shown. Check and make sure the LCD screen is centered. Tighten the bolts on Rail (C) and Brackets (E) by Allen key (F2) to secure the LCD screen to the Rails (C).